








## DTS PERFORMANCE SPECIFICATIONS

DTS Model	No Load Speed	Operational Speed Range	Continuous Torque	Peak Torque	Continuous Power	Maximum Power	Approximate Size (L x W x H)
DTS 1300	20,000 RPM	1,000 RPM to 15,000 RPM	60 in-oz .31 ft-lb .42 N-m	150 in-oz .78 ft-lb 1.06 N-m	.30 HP .22 kW	.74 HP .55 kW	5.8" x 2.6" x 2.6"
DTS 3300	15,000 RPM	1,000 RPM to 12,000 RPM	140 in-oz .73 ft-lb .99 N-m	410 in-oz 2.14 ft-lb 2.90 N-m	.69 HP .52 kW	2.03 HP 1.52 kW	8.3" x 3.9" x 3.6"
DTS 3402							10.0" x 3.9" x 3.4"
DTS 3404							12.0" x 3.9" x 3.4"
DTS 4402	8,500 RPM	1,000 RPM to 7,000 RPM	330 in-oz 1.72 ft-lb 2.33 N-m	1,260 in-oz 6.56 ft-lb 8.90 N-m	1.64 HP 1.22 kW	6.25 HP 4.66 kW	10.0" x 5.0" x 4.8"
DTS 4300							8.3" x 5.0" x 5.0"
DTS 4404							12.0" x 5.0" x 4.8"
DTS 5600 Series	7,000 RPM	1,000 RPM to 6,000 RPM	650 in-oz 5.90 ft-lb 8.00 N-m	1,350 in-oz 10.50 ft-lb 14.24 N-m	3.87 HP 2.88 kW	8.03 HP 5.99 kW	Consult factory. Size depends on arbor length and cradle design.


### CANTILEVER MOUNT SPINDLE MODELS




### OUTBOARD SUPPORT SPINDLE MODELS



### REMOVABLE ARBOR SPINDLE MODELS

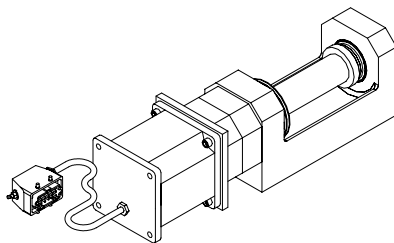

*DTS 5600  
SERIES*

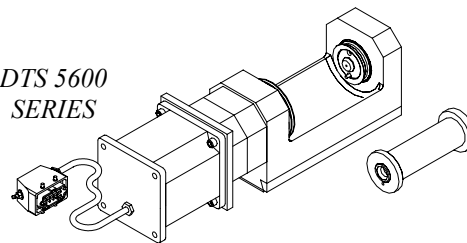

**G II Solutions, Inc.**  
201 Bank Street  
P.O. Box 428  
Central, SC 29630

Phone: 864.639.6605  
Fax: 864.639.4056  
E-mail: [info@giisolutions.com](mailto:info@giisolutions.com)  
Web Site: [www.giisolutions.com](http://www.giisolutions.com)